

14 years  
World No.1\*



Jack Facebook



Jack YouTube



**JACK TECHNOLOGY CO.,LTD**

ADD:No.1008, Donghai Avenue East, Jiao jiang District, Taizhou City,  
Zhejiang Province, China  
TEL:0086-576-88177782

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
<https://www.chinajack.com>

\*Source: Frost & Sullivan's research based on the number of industrial sewing machines sold by major global industrial sewing machine companies in each year between 2010 and 2023, market research completed in September 2024.

14 years  
World No.1\*

**JACK**

# J6

## Quick Reorder Pocket Welting Machine

No picking fabric No reworking



所有权利保留。未经许可，不得擅自复制或传播。如有侵权，必究。

No picking fabric  
No reworking  
\$90,000 more a year




• Ergonomic design



Bottom thread detection

The first in the industry, no empty needle, no waste piece, no needle breakage

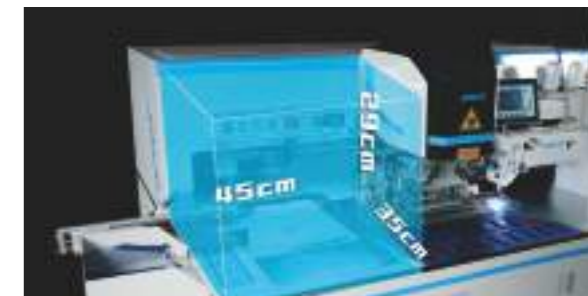

Extra large space

93% increase in operating space, more efficient in placing fabric

• Quick reorder folding pocket technology



Patented Electronic Folding Knife


Adaptive to thin and thick fabric, Sewing with any fabric



One mould, multiple sizes

3-minute mould change

• Quick reorder pocket closing technology

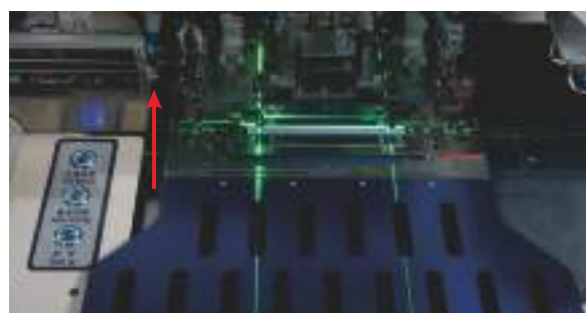

Bi-directional three-dimensional pocket

No shaking of the pocket closing, no running of the folded edges, rework rate <0.3%



Stable pressing of the fabric throughout the whole process

20% reduction in feeding fabric, 20% improvement in sewing efficiency


Sewing with any fabric




single jettted pocket



single jettted pocket +zipper

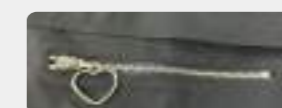


single zipper

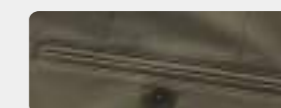

double jettted pocket




zipper+zipper cap

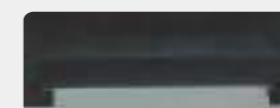

Three sided sewing (top)



double jettted pocket zipper+zipper cap

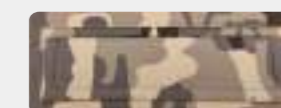

double jettted pocket +pocket flap



Three sided sewing (left)



fake pocket



parallelogram



Special shapes

Technical parameters

Machine head sewing speed	2800-3000rpm
equipped with machine head	shuttle type
Needle	DP*17
Sewing seam programming	Operation screen input method
Stitch Editing Storage Capacity	Stores 999 clock patterns
needle gauge	1.0mm--3.5mm
Presser foot rise height	60mm--80mm
Sewing pocket range	X-direction100mm-220mm
Sewing pocket speed	Y-direction8mm-40mm
Pocket folding method	10-15Seconds/pc

Pocket folding method	Four-way simultaneous quadruple fold pocket
Pocket welting method	laser cutting
laser power	120W
thread breakage sensor	Intelligent thread breakage sensor
Bottom thread detection	Bottom thread detection function
Fabric placement	Three-dimensional sewing pocket
Sewing work pattern	Pocket folding and sewing simultaneously
Fabric feeding drive method	Servo motor drive
Bottom pocket sewing	Secondary sewing method
power supply	220V