

14年全球
World No.1*

JACK

Thickness-adjustable direct-drive overlock sewing machine

Fix Less , Save More



Product Features



Light and heavy adjustable freely

material, M type-medium material to H type-heavy material freely; suitable for mesh, knitting, denim, etc different kinds of order demands.




Seam thickness upgrade

Large stitch width and thickness with long stroke, providing more powerful and stable power output, no skipped stitches or broken threads during thick material sewing.



Anti-counterfeiting

Enhance external features to prevent counterfeit machines and uphold the brand's professional image.

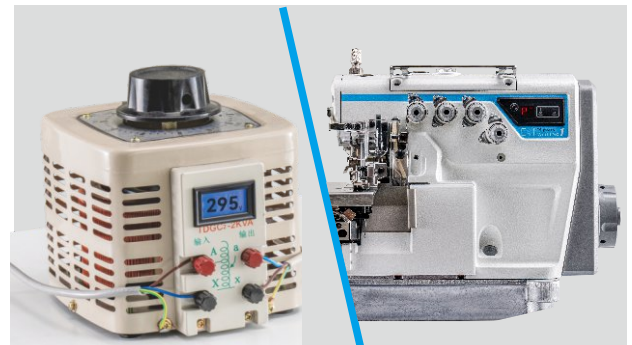

Wide operating voltage

Strong adaptability, ultra-stable, failure rate reduced to 0.05%, adaptable to an ultra-wide voltage range of 90-295V.

Specification

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Liftin Height (mm)	g	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E5-3-02/233	普通三线	#11	1	3	/	4	0.72-2	5.5		5500	515*360*510	27/34
E5-4-M03/333	普通四线	#11	2	4	2	2X4	0.72-2	6		5500	515*360*510	27/34
E5-5-03/233	五线5x5	#14	2	5	5	5X5	0.72-2	5.5		5500	515*360*510	27/36
E5-5-03/333	五线3x4	#14	2	5	3	3X4	0.72-2	5.5		5500	515*360*510	27/35
E5-5-M04/435	五线厚料	#19	2	5	5	5X6	0.8-1.5	7		5500	515*360*510	27/35
E5-6-03/333	普通六线	#11	3	6	3X2	3X2X4	0.72-2	5.5		5500	515*360*510	27/35
E5-6-M04/435	六线厚料	#19	3	6	5X2.5	5X2.5X3.5	0.8-1.5	7		5500	515*360*510	27/35
E5-2	二线接布缝	#11	1	2	/	6	0.72-2	3.5		5500	515*360*510	27/34
E5-3-82/233	三线倒回缝	#11	1	3	/	4	0.72-2	5.5		5500	515*360*510	27/34
E5-3-32R2/223	密拷机	#9	1	3	/	1.5	0.72-2	5.5		5500	515*360*510	27/34
E5-4-83/323	四线倒回缝	#11	2	4	2	2X4	0.72-2	5.5		5500	515*360*510	27/35
E5MJ-4-53/233	毛巾机	#11	2	4	2	2X4	0.72-2	5.5		5500	515*360*510	27/36