

JK-8740C

Bending arm type four needle six thread attaching sewing machine

- Spring-type presser foot structure, wide fabric adaptability
- Sealed design of machine head, no oil trouble
- Standard automatic presser foot lifter, high efficiency
- Small cylinder with 150mm circumference , which is smoother for sewing



Jack Wechat




Jack Facebook



YouTube

400-8876-858
www.chinajack.com



杰克科技股份有限公司

浙江省台州市椒江区东海大道东段1008号

电话 :0086-576-88177788 88177789

传真 :0086-576-88177758

JACK TECHNOLOGY CO.,LTD

No.1008, Donghai Road East, Jiaojiang District,
Taizhou city, Zhejiang, China

TEL:0086-576-88177788 88177789

FAX:0086-576-88177758

JK-8740C

Bending arm type four needle six thread attaching sewing machine

It is suitable for the sewing of sports underwear, swimwear, children's clothing, baby clothes, diving suits, yoga pants and other sewing products



Sports underwear

swimwear


baby clothes

diving suits

yoga pants



Spring-type presser foot structure, wide fabric adaptability

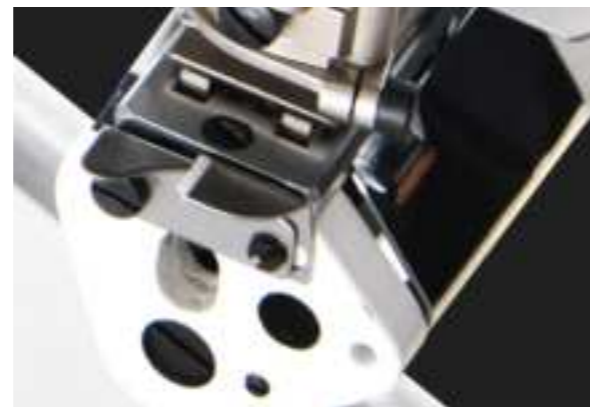

Sealed design of machine head, no oil trouble




Standard automatic presser foot lifter, high efficiency



Small cylinder with 150mm circumference, which is smoother for sewing

This is the basic model for bending arm type four needle six thread attaching sewing machine. Optional AW rubbish suction device for smoother swing and more beautiful stitches.

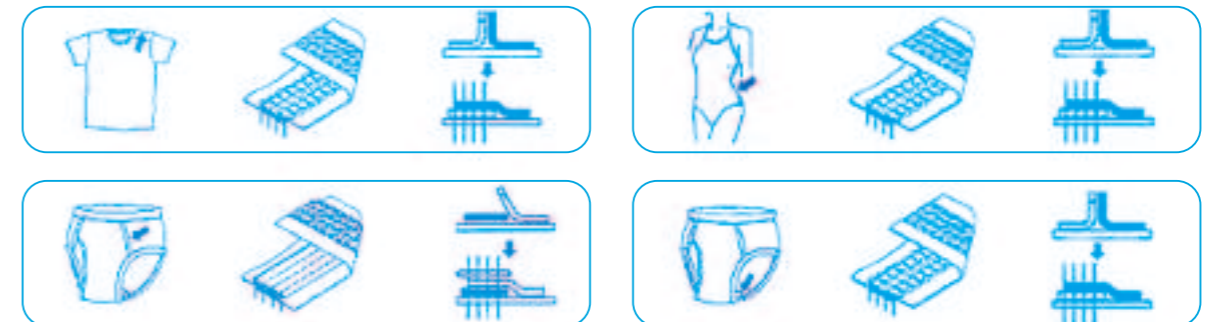

Technical parameter:

Model	Needle	Threads	Needle qty	Needle gauge	Differential ratio	Presser foot height	Needle bar distance	Max speed (S.p.m)	Fabric cutting method	Trimming method	Volume (mm)	Weight (kg)
JK-8740C-452-01-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-460-01-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-460-01-UTL-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Pneumatic type	64.5x53.5x49.5	45.9/61.7
JK-8740C-460-01-UT-AW2S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Electric way	64.5x53.5x49.5	47.1/59.1
JK-8740C-452-02-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-460-02-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-452-02-UTL-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Pneumatic type	64.5x53.5x49.5	45.9/61.7
JK-8740C-460-02-UT-AW2S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Electric way	64.5x53.5x49.5	47.1/59.1
JK-8740C-460-02H-D-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4
JK-8740C-452-02H-UTL-AW1S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Pneumatic type	64.5x53.5x49.5	45.9/61.7
JK-8740C-460-02H-UT-AW2S	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	Two-way cutting	Electric way	64.5x53.5x49.5	47.1/59.1
JK-8740C-460-01-D-AW1S-T1	#11	6	4	1.4-3.0	1:0.6-1:1.5	6.0	30	3200	One-way cutting	Manual way	64.5x53.5x49.5	44.3/58.4

Note: All electric presser foot lifters are standard equipment; D stands for direct drive, UT stands for electric thread trimmer, UTL stands for pneumatic thread trimmer; AW1S stands for pneumatic suction, AW2S stands for electric suction; O1 stands for one-way cut, O2 stands for two-way cut, O2H stands for double cut thick material;